

GSW

RESIDENTIAL



Envirosense™ Power Vent

90% Efficient Gas Water Heater

The Envirosense™ Power Vent is a 50-gallon, 76,000 BTU gas water heater, equipped with a fully submerged, spiral-shaped condensing heat exchanger. This design provides much greater heat transfer surface than a standard straight flue tube, resulting in 90% thermal efficiency and higher hot water output than standard 78% efficient water heaters. With a 22" diameter, Envirosense™ Power Vent can be installed in less space than a 75-gallon unit and delivers greater recovery and lower operating costs. The Envirosense™ Power Vent is so advanced, it can deliver "endless hot water for showers" ... a continuous flow of over 3 gallons per minute.*

Power Vent Design for Installation Versatility

- Modular blower, with 120V, 60Hz electrical system (5 amps or less), 6-foot cord with standard 3-prong connector
- Combined horizontal and vertical vent runs terminating through outside wall, using ULC S636 PVC pipe as follows:
 - 2" pipe allows vent runs up to 25 equivalent feet
 - 3" pipe allows vent runs up to 65 equivalent feet
 - 4" pipe allows vent runs up to 128 equivalent feet
- Supplied with PVC pipe and elbows to connect heat exchanger outlet to blower, including condensate elbow and drain, and ULC S636 PVC Vent Attenuation Assembly (VAA)

Side-Mounted Taps for Recirculating Systems

- Hot and cold "side taps" allow the Power Vent to be used for "combination" systems for water heating plus space heating, radiant floor heating or other applications requiring a recirculating hot water loop
- Plugs for recirculating taps are shipped with water heater

Intelli-Vent™ Gas Control with Silicon Nitride Hot Surface Igniter

- Premium-grade hot surface igniter eliminates standing pilot
- Electronic circuitry provides superior system diagnostic capabilities plus extremely precise temperature control

Commercial-Grade Glass Lining with Two Magnesium Anode Rods

- Superior protection against tank corrosion
- Glass lining protects all "water side" tank surfaces plus inside of internal heat exchanger exposed to condensate

PEXAN™ Diffuser Dip Tube

- Helps reduce lime and sediment buildup, maximize hot water output
- PEXAN cross-link polymer withstands long-term exposure to temperatures up to 400°F

Six-Year Limited Parts And Tank Warranty

- Consult written warranty shipped with water heater or contact GSW for complete warranty information

Available in Natural Gas Only



* 3.07 GPM continuous flow, based on 65°F inlet water temperature and 110°F outlet water temperature.

Envirosense™ Power Vent

90% Efficient Residential Gas Water Heater

SPECIFICATIONS

MODEL NUMBER	BTU INPUT PER HOUR	TANK SIZE GALLONS (LITRES)	FIRST HOUR DELIVERY GALLONS (LITRES)	RECOVERY-GALLONS (LITRES) PER HOUR AT 90°F RISE	SHIPPING WEIGHT LB (KG)
6G5076NVC-02	76,000	50 (189)	127 (481)	92 (347)	210 (95)

Natural gas only



High-altitude model (5,300 - 10,700 ft) available: replace '02' with '04'

DIMENSIONS IN INCHES (CENTIMETRES)

	A	B	C	D	E	F	G	H	I	J
INCHES	70-5/8	68-1/4	52	21	9-1/8	12	22	8	15-3/4	27
(CM)	(179)	(173)	(132)	(53)	(23)	(31)	(56)	(20)	(40)	(69)

Top inlet and outlet connections: 3/4" male NPT

Circulation loop connections: 3/4" female NPT

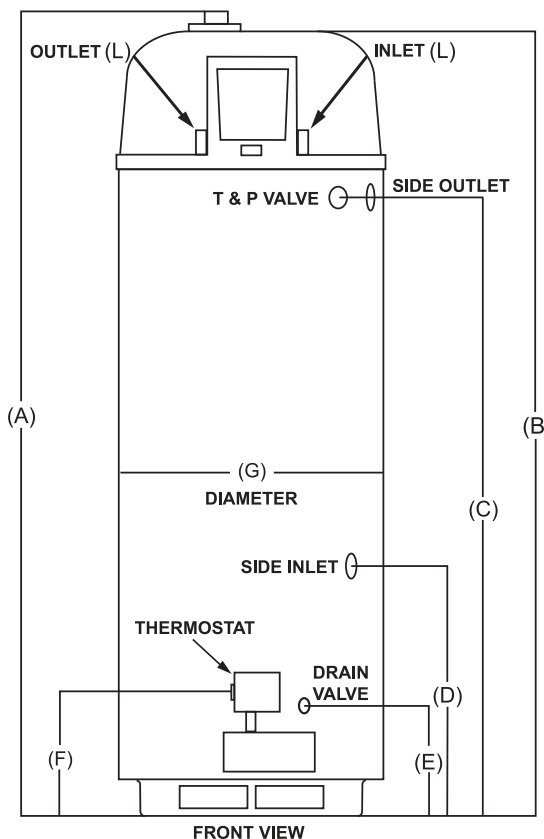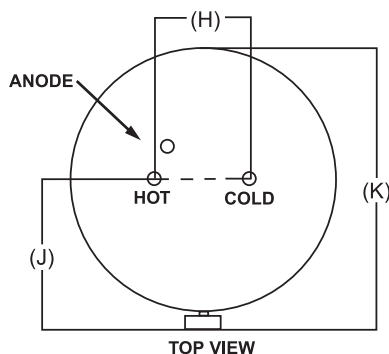

GSW Water Heating
HEAD OFFICE:
 599 Hill Street West
 Fergus, ON, Canada N1M 2X1
 Tel: 888-599-2837
 Fax: 519-787-5500
 E-mail: gswinfo@gsw-wh.com